


LENZI EGISTO® by FF

Sede Legale ed amministrativa: Via G. Di Vittorio,52 – I – 59021 VAIANO Tel. +39 (0) 574.946030/ 0574.946599
 - Fax + 39 (0) 574.946048/ 0574.22115
 e-mail: lab.resp@lenzie.it – <http://www.lenzie.it>
 Codice Fiscale /P.IVA 06270040485

Fabric Certificate:FUJIYAMA

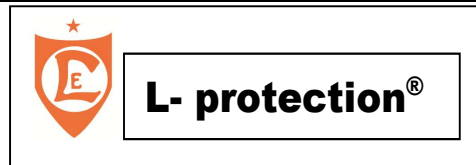

Certificate Issued: 19/03/2012

Identification		Construction	
Reference name:	FUJIYAMA	weight:(± 5%)	375 field gr/sqm (ISO 3801)
Usable width cm.:	155 (± 2%)	weight:(± 5%)	580 grs./lin mt. (ISO 3801)
		Comp.:	70%PAN 30%AR

Weaving			Warp	Weft
Finishing		End count	Yarns:	

Brands: Kevlar®

Performance				
		Warp	Weft	Test Methods
Tear strength: (Newton , singler tear)		>45	>50	EN ISO 13937-2
Dimensional stability washing:		- 2.8%	- 1.6%	ISO 15797 (40°C)
Tensile Strength (Newton)		>680	>608	BS EN ISO 13934-1(100mm100mm)
Extension (Percentage)		8%	11%	
Seam slippage: (N) Seam:		101	142	UNI EN 13936-1 (3 mm)
Unseamed:		>200	>200	
EN ISO 11612:2008	7.4 Molten alluminium splash	LEVEL D2		
EN ISO 11612:2008	7.5 Molten iron splash	LEVEL E3		

Note: Test reports carried out on single fabric. The results of the chosen bonding change the fabric-performances.

Please note that above mentioned datas are average figures. Results have been obtained by testing at Lenzi Egisto laboratories in Vaiano, following tests and methods procedures as ISO, UNI etc, as stated. Lenzi Egisto Spa reserve the rights to change paramethers with no previous notice. We recommend that any fabric has to be carefully evaluated on the basis of final employ. Lenzi Egisto spa can not be responsible for a fabric used when its thecnical caracteristic are not suitable for its end use.