


LENZI EGISTO® by FF

Sede Legale ed amministrativa: Via G. Di Vittorio,52 – I – 59021 VAIANO Tel. +39 (0) 574.946030/ 0574.946599
 - Fax + 39 (0) 574.946048/ 0574.22115
 e-mail: lab.resp@lenzie.it – <http://www.lenzie.it>
 Codice Fiscale /P.IVA 06270040485

Fabric Certificate:KILAUEA

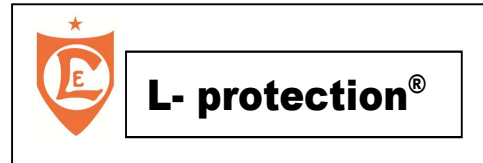

Certificate Issued: 24/09/2010

Identification		Construction	
Reference name:	KILAUEA	weight:(± 5%)	306 field gr/sqm (ISO 3801)
Usable width cm.:	155 (± 2%)	weight:(± 5%)	475 grs./lin mt. (ISO 3801)
		Comp.:	60%PAN 40%AR

Weaving		Warp	Weft
Finishing		End count	Yarns:

Brands: Kevlar®

Performance				
		Warp	Weft	Test Methods
Abrasion resistance: DRY (nu Martindale)	55.000			UNI EN 13520 (9 kPa)
WET	22.000			
Tear strength: (Newton , singler tear)		>90	>70	EN ISO 13937-2
Pilling: (nu Martindale)	4/5			UNI EN 13520
Tensile Strength (Newton)		>1700	>900	BS EN ISO 13934-1(200mm100mm/min)
Extension (Percentage)		18%	10%	
Seam slippage: (N) Seam:		104	58	UNI EN 13936-1 (3 mm)
Unseamed:		>200	>200	

Handling instruction:

End-Use Suitability:

Note:Test reports carried out on single fabric. The results of the chosen bonding change the fabric-performances.

Please note that above mentioned datas are average figures. Results have been obtained by testing at Lenzi Egisto laboratories in Vaiano, following tests and methods procedures as ISO, UNI etc, as stated. Lenzi Egisto Spa reserve the rights to change paramethers with no previous notice.We recommend that any fabric has to be carefully evaluated on the basis of final employ.Lenzi Egisto spa can not be responsible for a fabric used when its thecnical caracteristic are not suitable for its end use.